



WR系列吸油过滤器 WR SUCTION FILTER SERIES

(一) 简介 INTRODUCTION


该过滤器属于粗过滤器，一般安装在油泵的吸油口处，用以保护油泵避免吸入较大的机械杂质。该过滤器结构简单，采用R螺纹连接无须另外密封，安装方便并且通油能力大阻力小。

The filter is rough filter and can be installed at the inlet of the pump, which can protect the pump from breathe the bigger impurity. The filter is simple designed with R thread connection. No need additional sealing, easy installation with big capacity small resistance.

(三) 技术参数 TECHNICAL DATA

型号 Model	接口螺纹 Connecting thread	公称流量 Flow rate (L/min)	原始压力损失 Initial ΔP (MPa)	过滤精度 Filtr. (μm)
WR - 16 × * - J	Rc1/2	16	≤0.01	80
WR - 25 × * - J	Rc3/4	25		100
WR - 45 × * - J	Rc3/4	45		180
WR - 63 × * - J	Rc1	63		
WR - 150 × * - J	Rc1 1/4	150		

(四) 连接尺寸 MOUNTING SIZE

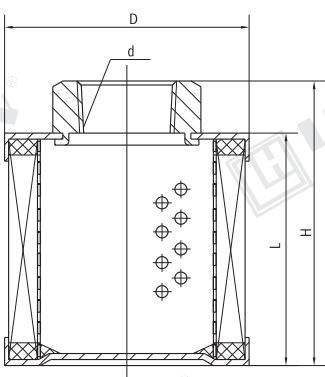

型号 Model	d	D	H	L
WR - 16 × * - J	Rc1/2	61	62	50
WR - 25 × * - J	Rc3/4	61	71	58
WR - 45 × * - J	Rc3/4	101	75	60
WR - 63 × * - J	Rc1	101	90	73
WR - 150 × * - J	Rc1 1/4	104	87	71