



LEEMIN
黎明液压

欧标系列蓄能器

EUROPEAN STANDARD ACCUMULATORS

(一) 型号说明 MODEL CODE

PED L /34.5

公称压力(MPa) Nominal Pressure 34.5MPa

公称容积(L) Nominal Volume (L)

欧标蓄能器 European Standard Accumulators


(二) 技术参数 TECHNICAL DATA

1. 结构形式：底拆，顶拆结构。Construction: Bottom repair, top repair.
2. 固定方式：紧固箍或支座。Fixation way: Clamp or bracket.
3. 安装方式：原则上垂直安装。Installation: vertical.
4. 工作介质：液压油，乳化液。Medium: Hydraulic oil, emulsion.
5. 设计温度：-10 ~+70 。Operating temperature: -10 ~+70
6. 胶囊充入气体：氮气。Gas charged in the bladder: Nitrogen.


(三) 外形尺寸 MOUNTING SIZE



底拆式结构
Bottom repair construction

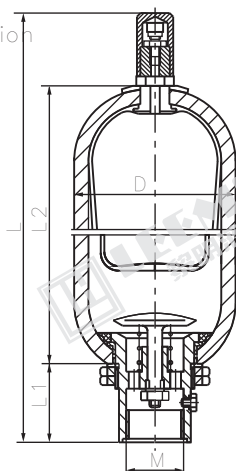

顶拆式结构
Top repair construction

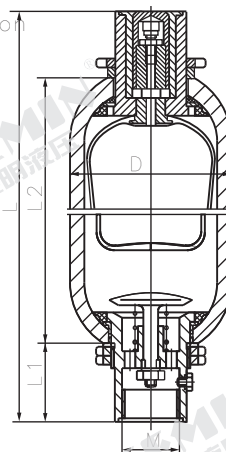

型号 Model	公称压力 Press. (psi)	容积 Volume (L)	重量 Weight (kg)	尺寸(mm) Size				
				D	L1	L2	L	M
PED1/34.5	34.5	1	5.5	114	47	197	302	G3/4
PED2/34.5		2	6			315	445	
PED4/34.5		4	11			315	447	
PED6/34.5		6	15.5	168	63	410	532	G1 1/4
PED10/34.5		10	37			427	551	
PED15/34.5		15	49			582	726	
PED20/34.5		20	61	229	86	737	881	G2
PED24/34.5		24	70			857	1001	
PED32/34.5		32	95			1107	1257	
PED40/34.5		40	105			1354	1498	
PED50/34.5		50	117			1663	1807	